
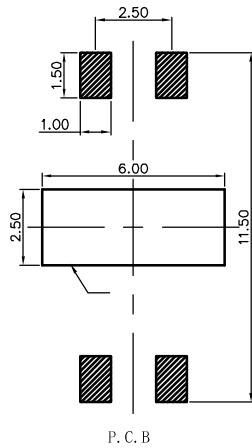






Electrical properties

- 1 `Current rating:1A AC\DC
- 2 `Voltage rating: 250V AC\DC
- 3 `Temperature range: -25°C to 85°C
- 4 `Contact resistance:Initial value/30mΩ max
- 5 `Insulation resistance:60MΩ min
- 6 `Withstanding voltage:500V AC/ minute

Environmental controls

- 1 `Banned contains SS - 00259 are restricted substances.
- 2 `The corresponding issued by SGS or ITS icp-aes data, Not the material in a list, and validity.



MATERIALS & PLATINGS TABLE

1	BB2505-02	/	/	/	Bbronze	線底40 μ -100 μ 鍍錫80 μ -200 μ
2	BB2505-05	/	/	/	Plastic	LCP i130本色
ITEM	PART NO:	COMPONENT		Q' TY	MATERIAL	FINISH

LHF 东莞市连海电子有限公司
DONG GUAN LIAN HAI ELECTRONICS CO.LTD

DRAW NO:	DATE	MODEL NO	DRAW NAME
DESIGN:		P/N NO:	
CHECK:	周涛	BB2505-WR-S-2P	
REVIEW:		REV C	SCALE 1:1
		UNIT: mm	SHEET: 1 OF 1

DIM	TOL	DIM	TOL
X	/	X*	/
X.X	±0.15	X.X*	±2*
X.XX	±0.10	X.XX*	±1*
X.XXX	±0.05	X.XXX*	/






REV	DESCRIPTION	MARK
A1	初始版本	

Electrical properties

- 1 `Current rating:1A AC\DC
- 2 `Voltage rating: 250V AC\DC
- 3 `Temperature range: -25°C to 85°C
- 4 `Contact resistance:Initial value/30mΩ max
- 5 `Insulation resistance:60MΩ min
- 6 `Withstanding voltage:500V AC/ minute

Environmental controls

- 1 `Banned contains SS - 00259 are restricted substances.
- 2 `The corresponding issued by SGS or ITS icp-aes data, Not the material in a list, and validity.

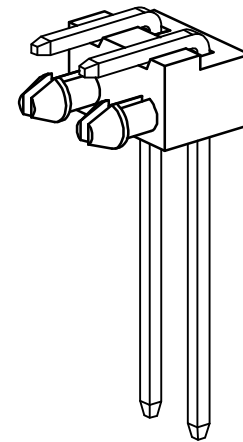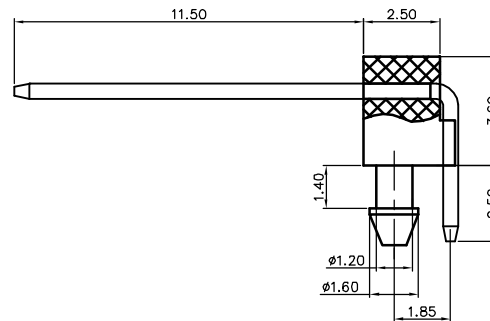

P. C. B

MATERIALS & PLATINGS TABLE

ITEM	PART NO:	COMPONENT	Q'TY	MATERIAL	FINISH
1	BB2505-02	/	/	Bbronze	線底40 μ -100 μ 鍍錫80 μ -200 μ
2	BB2505-05	/	/	Plastic	LCP i130本色

LHF 东莞市连海电子有限公司
DONG GUAN LIAN HAI ELECTRONICS CO.LTD

DRAW NO.	DATE	MODEL NO	DRAW NAME
DESIGN:		P/N NO:	
CHECK:	周涛	BB2505-WV-S-2P	
REVIEW:		REV C	SCALE 1:1
UNIT:	mm	SHEET:	1 OF 1

DIM	TOL	DIM	TOL
X.	/	X.*	/
X.X	±0.15	X.X*	±2°
X.XX	±0.10	X.XX*	±1°
X.XXX	±0.05	X.XXX*	/