
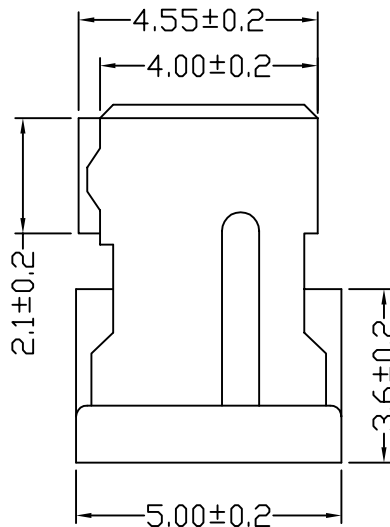
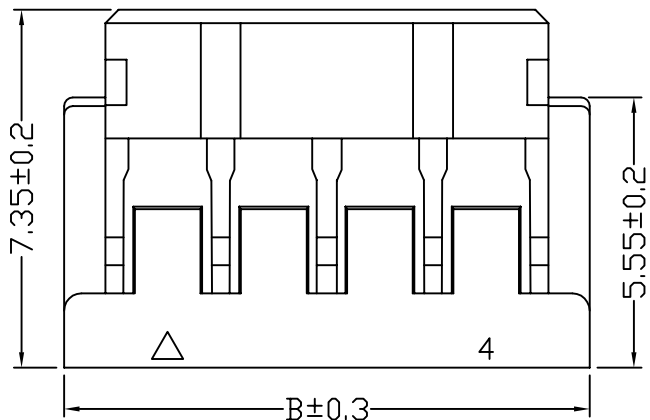


环保物料

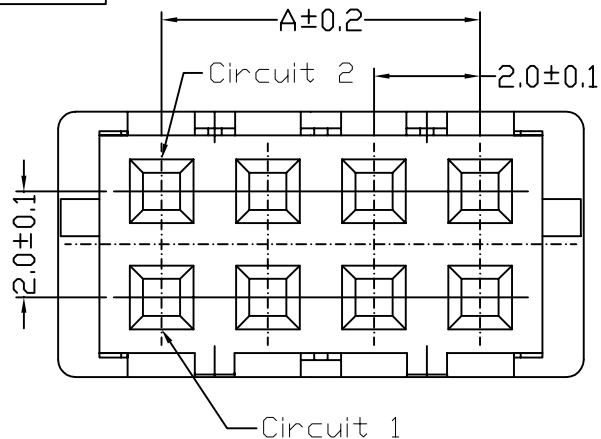

■ Specifications(规格) :

- Voltage rating(额定电压): 250V AC / DC
- Current rating(额定电流): 2A AC / DC
- Withstanding voltage(耐压值): 800V AC/minute
- Temperature range(工作温度): -25°C~+85°C
- Insulation resistance(绝缘电阻): $\geq 1000M\Omega$
- Contact resistance(接触电阻): $\leq 20m\Omega$
- After environmental testing(环境测试后): $\leq 30m\Omega$



Poles	Dimension(mm)	
	A	B
04	2.00	6.00
06	4.00	8.00
08	6.00	10.00
10	8.00	12.00
12	10.00	14.00
14	12.00	16.00
16	14.00	18.00
18	16.00	20.00
20	18.00	22.00
22	20.00	24.00
24	22.00	26.00
26	24.00	28.00
28	26.00	30.00
30	28.00	32.00
32	30.00	34.00
34	32.00	36.00
36	34.00	38.00
38	36.00	40.00
40	38.00	42.00

A2011-H-2*NP	Nylon 66 UL 94V-0	A2011-T	A2011-W	1,000Pcs
PART NO	Material	Suitable Terminal	Mates With Wafer	Q' ty/Bag


DIM	TOL	DIM	TOL
X.	/	X.*	/
X.X	±0.15	X.X*	±2*
X.XX	±0.10	X.XX*	±1*
X.XXX	±0.05	X.XXX*	/

LHF东莞市连海电子有限公司 DONG GUAN LIAN HAI ELECTRONICS CO.,LTD			
DRAW NO.	DATE	MODEL NO P/N NO.	DRAW NAME
DESIGN:		A2011-H-2*NP	DF11 HSG-2*NP
CHECK	周涛		
REVIEW:		REV C	SCALE 1:1
		UNIT: mm	SHEET: 1 OF 1



环保物料

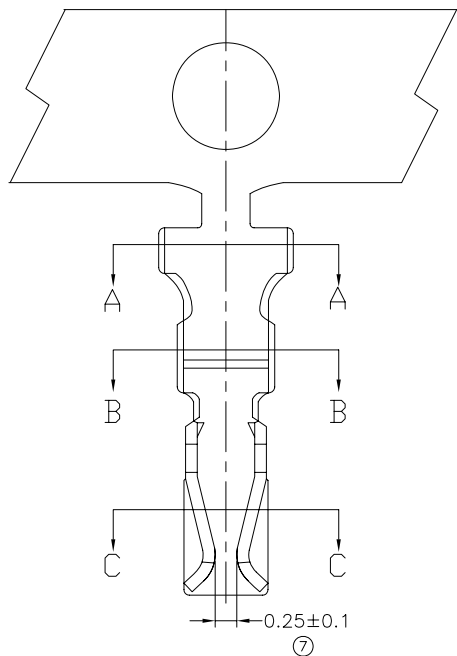

Section: A-A



Section: B-B

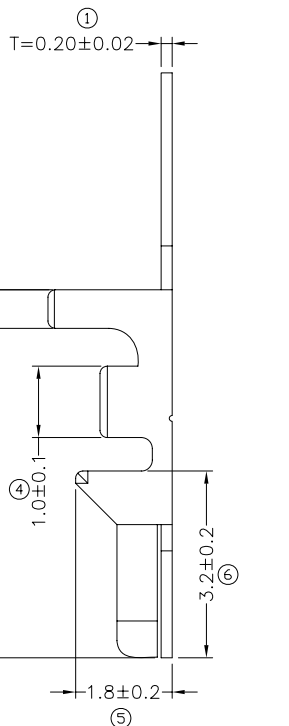

Section: C-C

■ Specifications(规格) :

- Voltage rating(额定电压): 250V AC / DC
- Current rating(额定电流): 3A AC / DC
- Withstanding voltage(耐压值): 800V AC/minute
- Temperature range(工作温度): -25°C~+85°C
- Insulation resistance(绝缘电阻): $\geq 1000M\Omega$
- Contact resistance(接触电阻): $\leq 10m\Omega$
- After environmental testing(环境测试后): $\leq 20m\Omega$

■ TERMINAL

- Part No. : A2011-T
- Applicable wire: AWG#22-#30
- Material: phosphor Bronze
- Finish: Tin plated

LHF 东莞市连海电子有限公司
DONG GUAN LIAN HAI ELECTRONICS CO.,LTD

DRAW NO.	DATE	MODEL NO	DRAW NAME
DESIGN:		P/N NO:	
CHECK	周涛	A2011-T	DF11镀锡端子
REVIEW:		REV C	SCALE 1:1
		UNIT: mm	SHEET: 1 OF 1

DIM	TOL	DIM	TOL
X.	/	X.*	/
X.X	±0.15	X.X*	±2*
X.XX	±0.10	X.XX*	±1*
X.XXX	±0.05	X.XXX*	/