


MATERIAL: NYLON 66 UL94V-0

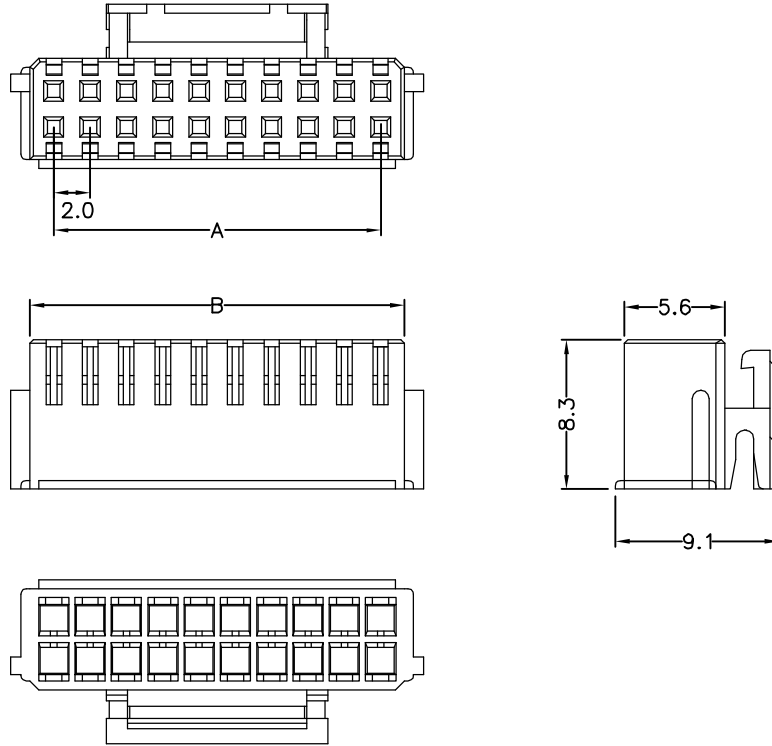




Dimensional & Ordering Information:

Circuits	Part No	Dimension(mm)	
		A	B
2	A2005-H-2*02P	2.0	4.6
3	A2005-H-2*03P	4.0	6.6
4	A2005-H-2*04P	6.0	8.6
5	A2005-H-2*05P	8.0	10.6
6	A2005-H-2*06P	10.0	12.6
7	A2005-H-2*07P	12.0	14.6
8	A2005-H-2*08P	14.0	16.6
9	A2005-H-2*09P	16.0	18.6
10	A2005-H-2*10P	18.0	20.6
11	A2005-H-2*11P	20.0	22.6
12	A2005-H-2*12P	22.0	24.6
13	A2005-H-2*13P	24.0	26.6
14	A2005-H-2*14P	26.0	28.6
15	A2005-H-2*15P	28.0	30.6
16	A2005-H-2*16P	30.0	32.6
17	A2005-H-2*17P	32.0	34.6
18	A2005-H-2*18P	34.0	36.6
19	A2005-H-2*19P	36.0	38.6
20	A2005-H-2*20P	38.0	40.6

Poles	2~20 Poles
Pitch between poles	2.0mm
Rated Voltage	250V AC,DC
Rated current	2A
Withstand Voltage	800V AC/minute
Insulation Resistance	1,000M $\Omega$ /min
Temperaure Range	-25~85°C
Applicable Wire	AWG#22~#30

REV	ECN NO.	UNIT	TOLERANCE	PROJECTION	DRAWING	CHECK	APPROVAL
A	NEW DRAWING	mm	.*** $\pm 0.08$		周涛	周涛	刘丽娜
B			.** $\pm 0.15$				
			.* $\pm 0.25$				

MATERIAL: NYLON 66 UL94V-0

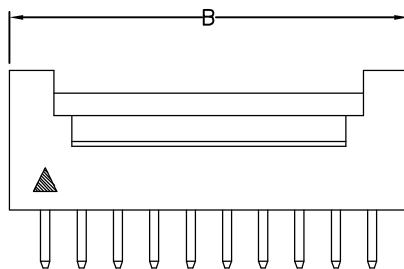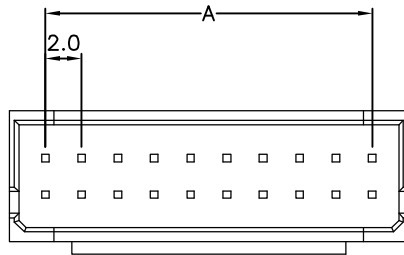




Dimensional & Ordering Information:

Circuits	Part No	Dimension(mm)	
		A	B
2	A2005-WV-2*02P	2.0	6.0
3	A2005-WV-2*03P	4.0	8.0
4	A2005-WV-2*04P	6.0	10.0
5	A2005-WV-2*05P	8.0	12.0
6	A2005-WV-2*06P	10.0	14.0
7	A2005-WV-2*07P	12.0	16.0
8	A2005-WV-2*08P	14.0	18.0
9	A2005-WV-2*09P	16.0	20.0
10	A2005-WV-2*10P	18.0	22.0
11	A2005-WV-2*11P	20.0	24.0
12	A2005-WV-2*12P	22.0	26.0
13	A2005-WV-2*13P	24.0	28.0
14	A2005-WV-2*14P	26.0	30.0
15	A2005-WV-2*15P	28.0	32.0
16	A2005-WV-2*16P	30.0	34.0
17	A2005-WV-2*17P	32.0	36.0
18	A2005-WV-2*19P	34.0	38.0
19	A2005-WV-2*20P	36.0	40.00
20	A2005-WV-2*02P	38.0	42.00

Poles	2~20 Poles
Pitch between poles	2.0mm
Rated Voltage	250V AC,DC
Rated current	2A
Withstand Voltage	800V AC/minute
Insulation Resistance	1,000M $\Omega$ /min
Temperaure Range	-25~85°C
Applicable Wire	AWG#24~#30

REV	ECN NO.	UNIT	TOLERANCE	PROJECTION	DRAWING	CHECK	APPROVAL
A	NEW DRAWING	mm	.*** $\pm 0.08$		周涛	周涛	刘丽娜
B			.** $\pm 0.15$				
			.* $\pm 0.25$				

MATERIAL: NYLON 66 UL94V-0

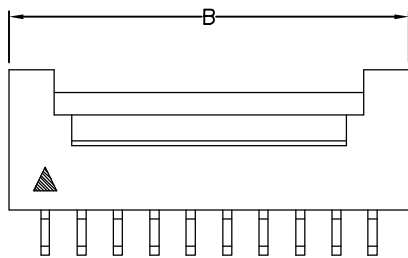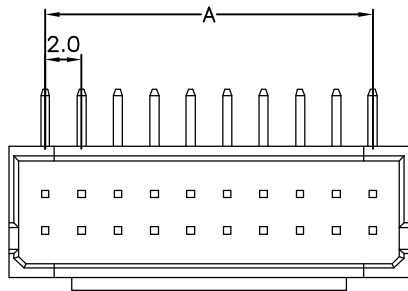

Dimensional & Ordering Information:

Circuits	Part No	Dimension(mm)	
		A	B
2	A2005-WR-2*02P	2.0	6.0
3	A2005-WR-2*03P	4.0	8.0
4	A2005-WR-2*04P	6.0	10.0
5	A2005-WR-2*05P	8.0	12.0
6	A2005-WR-2*06P	10.0	14.0
7	A2005-WR-2*07P	12.0	16.0
8	A2005-WR-2*08P	14.0	18.0
9	A2005-WR-2*09P	16.0	20.0
10	A2005-WR-2*10P	18.0	22.0
11	A2005-WR-2*11P	20.0	24.0
12	A2005-WR-2*12P	22.0	26.0
13	A2005-WR-2*13P	24.0	28.0
14	A2005-WR-2*14P	26.0	30.0
15	A2005-WR-2*15P	28.0	32.0
16	A2005-WR-2*16P	30.0	34.0
17	A2005-WR-2*17P	32.0	36.0
18	A2005-WR-2*19P	34.0	38.0
19	A2005-WR-2*20P	36.0	40.00
20	A2005-WR-2*02P	38.0	42.00




Poles	2~20 Poles
Pitch between poles	2.0mm
Rated Voltage	250V AC,DC
Rated current	2A
Withstand Voltage	800V AC/minute
Insulation Resistance	1,000MΩ/min
Temperaure Range	-25~85°C
Applicable Wire	AWG#24~#30

REV	ECN NO.	UNIT	TOLERANCE	PROJECTION	DRAWING	CHECK	APPROVAL
A	NEW DRAWING	mm	*** ±0.08		周涛	周涛	刘丽娜
B			** ±0.15				
			* ±0.25				


产品编号

A2005-T


产品名称

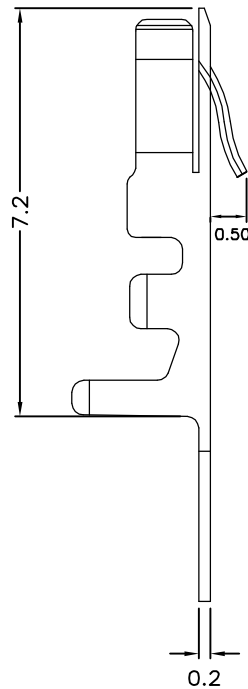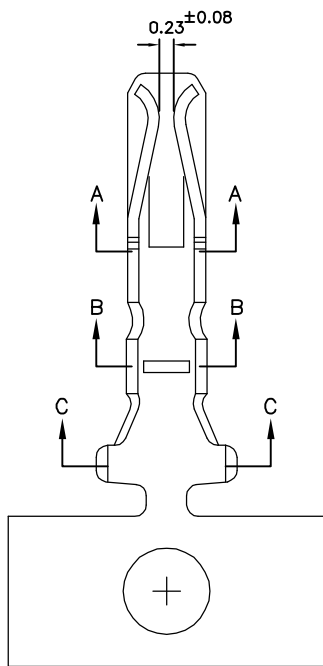

Section A-A



Section B-B



Section C-C

Specifications & Ordering Information:

Part No	Wire Range	Material	Finish	Qty/reel
A2005-T	AWG#24~#30	Phosphor bronze	Tin-Plated	10,000 PCS

REV	ECN NO.	UNIT	TOLERANCE	PROJECTION	DRAWING	CHECK	APPROVAL
A	NEW DRAWING	mm	.*** ±0.08		周涛	周涛	刘丽娜
B			.** ±0.15				
			.* ±0.25				