
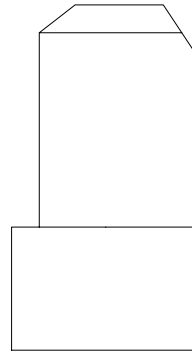
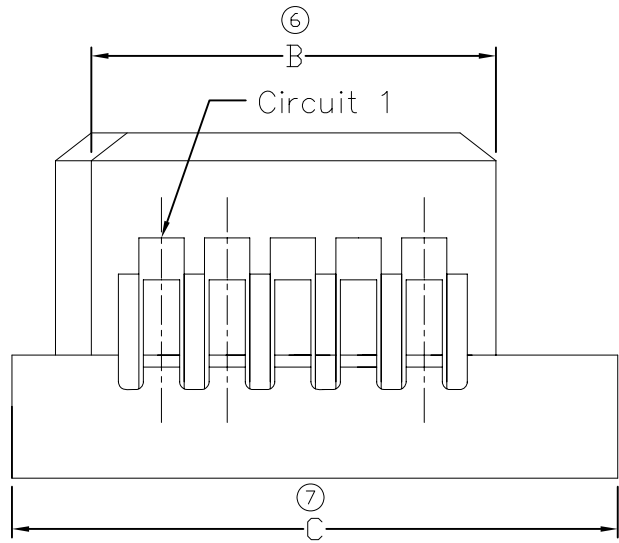


环保物料

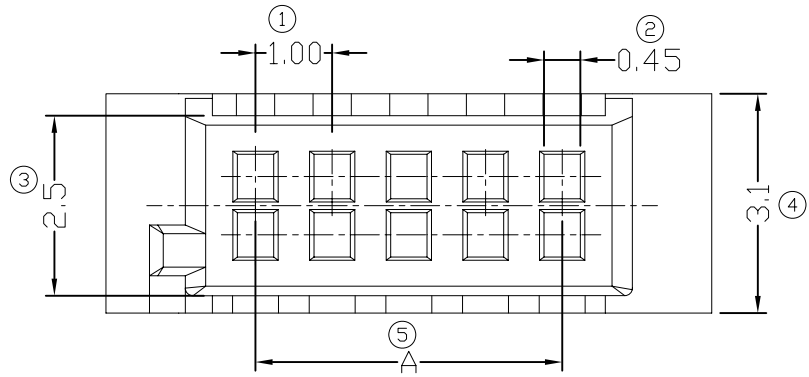

■ Specifications(规格) :

- Voltage rating(额定电压): 50V AC / DC
- Current rating(额定电流): 1A AC / DC
- Withstanding voltage(耐压值): 500V AC/minute
- Temperature range(工作温度): -25°C~+85°C
- Insulation resistance(绝缘电阻): $\geq 100M\Omega$
- Contact resistance(接触电阻): $\leq 20m\Omega$
- After environmental testing(环境测试后): $\leq 30m\Omega$

HOUSING

Part No:A1003-H-2*NP

Poles:6P-36P,50P

Material:Nylon66 UL94V-0




Poles	Dimensions (mm)		
	A	B	C
06	2.00	4.00	6.60
08	3.00	5.00	7.60
10	4.00	6.00	8.60
12	5.00	7.00	9.60
14	6.00	8.00	10.60
16	7.00	9.00	11.60
18	8.00	10.00	12.60
20	9.00	11.00	13.60
22	10.00	12.00	14.60
24	11.00	13.00	15.60
26	12.00	14.00	16.60
28	13.00	15.00	17.60
30	14.00	16.00	18.60
32	15.00	17.00	19.60
34	16.00	18.00	20.60
36	17.00	19.00	21.60
50	24.00	26.00	28.60

LHF 东莞市连海电子有限公司
DONG GUAN LIAN HAI ELECTRONICS CO.LTD


DRAW NO.	DATE	MODEL NO P/N NO:	DRAW NAME
DESIGN:	周涛	A1003-H-2*NP	88252 HSG-2*nP
CHECK:		REV C	SCALE 1:1
REVIEW:		UNIT: mm	SHEET: 1 OF 1

DIM	TOL	DIM	TOL
X.	±0.15	X.*	±2*
X.X	±0.10	X.XX*	±1*
X.XXX	±0.05	X.XXX*	/

环保物料

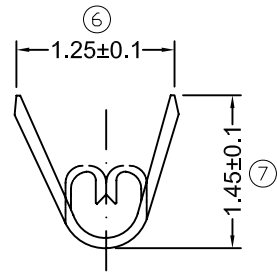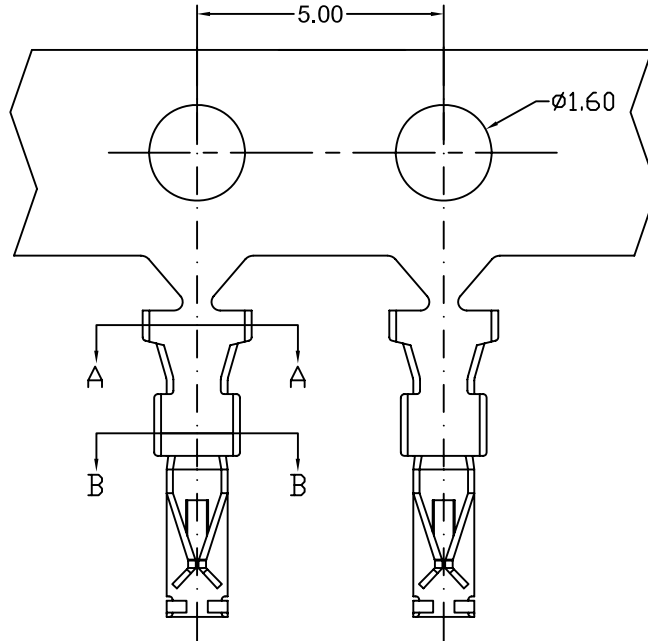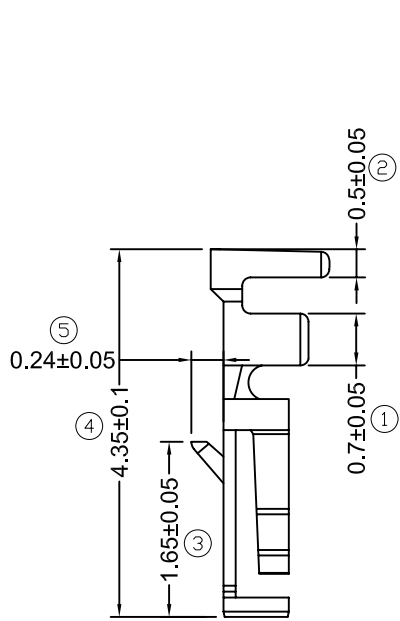

A-A SEC



B-B SEC

■ Specifications(规格) :

- Voltage rating(额定电压): 50V AC / DC
- Current rating(额定电流): 1A AC / DC
- Withstanding voltage(耐压值): 500V AC/minute
- Temperature range(工作温度): -25°C~+85°C
- Insulation resistance(绝缘电阻): $\geq 100M\Omega$
- Contact resistance(接触电阻): $\leq 20m\Omega$
- After environmental testing(环境测试后): $\leq 30m\Omega$

TERMINAL

Part No:A1003-T

Applicable Wire:AWG#28-#32

Material:Phosphor Bronze

Finish:Gold Plated

LHF 东莞市连海电子有限公司
DONG GUAN LIAN HAI ELECTRONICS CO.LTD

DRAW NO.	DATE	MODEL NO P/N NO:	DRAW NAME
DESIGN:		A1003-T-GEP-01U	88252 镀金端子
CHECK	周涛	REV C	SCALE 1:1
REVIEW:		UNIT: mm	SHEET: 1 OF 1

DIM	TOL	DIM	TOL
X.	/	X.*	/
X.X	±0.15	X.X*	±2*
X.XX	±0.10	X.XX*	±1*
X.XXX	±0.05	X.XXX*	/