

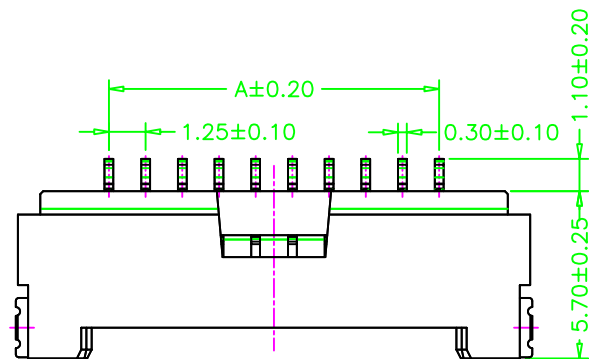




21P~30P
SCALE 0.8:1

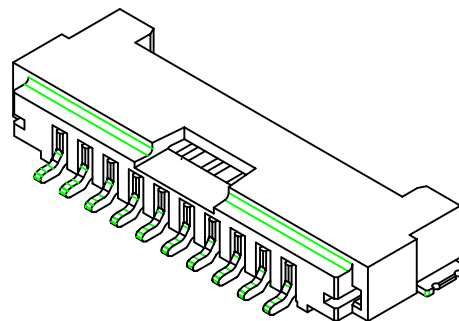

02P~20P

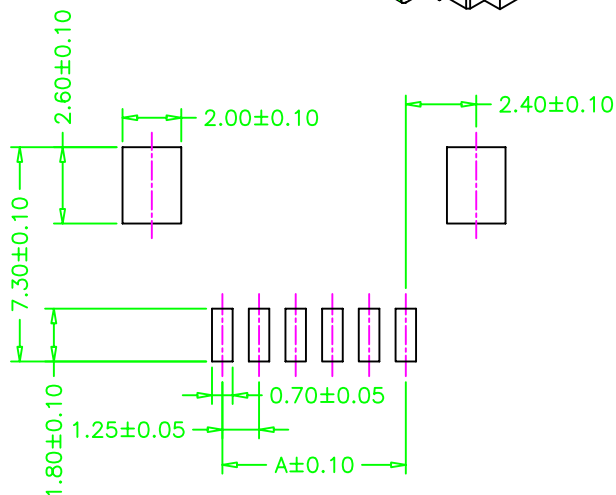

P.C.B. LAYOUT

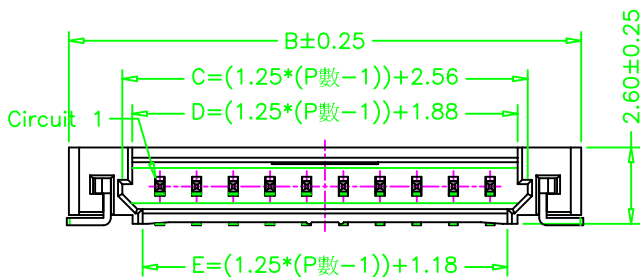

SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 150V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 30mΩ Max.
Insulation Resistance: 500MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Tin-plated
Solder Tabs: Brass/Tin-plated
Material: Nylon 6T,UL94V-0
Color: Natural(Beige)

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
A1253WRA-S-02P	1.25	7.45
A1253WRA-S-03P	2.50	8.70
A1253WRA-S-04P	3.75	9.95
A1253WRA-S-05P	5.00	11.20
A1253WRA-S-06P	6.25	12.45
A1253WRA-S-07P	7.50	13.70
A1253WRA-S-08P	8.75	14.95
A1253WRA-S-09P	10.00	16.20
A1253WRA-S-10P	11.25	17.45
A1253WRA-S-11P	12.50	18.70
A1253WRA-S-12P	13.75	19.95
A1253WRA-S-13P	15.00	21.20
A1253WRA-S-14P	16.25	22.45
A1253WRA-S-15P	17.50	23.70
A1253WRA-S-20P	23.75	29.95
A1253WRA-S-25P	30.00	36.20
A1253WRA-S-30P	36.25	42.45

LHF 东莞市连海电子有限公司
DONG GUAN LIAN HAI ELECTRONICS CO. LTD

DRAW NO.	DATE	MODEL NO	DRAW NAME
DESIGN:		P/N NO:	
CHECK:	周涛	A1253-WRA-S-NP	DF14 带扣针座
REVIEW:		REV C	SCALE 1:1
		UNIT: mm	SHEET: 1 OF 1

DIM	TOL	DIM	TOL
X.	/	X.*	/
X.X	±0.15	X.X*	±2°
X.XX	±0.10	X.XX*	±1°
X.XXX	±0.05	X.XXX*	/